

06/15/00  
JC603 U.S. PTO

ATLANTA  
404•653•6400  
PALO ALTO  
650•849•6600

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.  
1300 I STREET, N. W.  
WASHINGTON, DC 20005-3315

202 • 408 • 4000  
FACSIMILE 202 • 408 • 4400

WRITER'S DIRECT DIAL NUMBER

(202) 408-4024

June 15, 2000

PTO  
09/593864  
06/15/00

TOKYO  
011•813•3431•6943  
BRUSSELS  
011•322•646•0353

ATTORNEY DOCKET NO.: 04329.2319

**Box Patent Application**  
**Assistant Commissioner for Patents**  
**Washington, D.C. 20231**

New U.S. Patent Application  
Title: MUTUAL AUTHENTICATION METHOD, RECORDING APPARATUS,  
REPRODUCING APPARATUS, AND RECORDING MEDIUM  
Inventors and Addresses:

- 1) Tooru KAMIBAYASHI  
Chigasaki-shi, Japan
- 2) Hisashi YAMADA  
Yokohama-shi, Japan
- 3) Hiroshi IWASAKI  
Yokohama-shi, Japan
- 4) Masafumi TAMURA  
Chofu-shi, Japan
- 5) Yasuhiro ISHIBASHI  
Ome-shi, Japan
- 6) Taku KATO  
Kamakura-shi, Japan
- 7) Makoto TATEBAYASHI  
Takarazuka-shi
- 8) Shunji HARADA  
Osaka-shi, Japan

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.  
Assistant Commissioner for Patents  
June 15, 2000  
Page 2

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. A check for \$846 representing the filing fee.
2. Application - 43 pages, including 5 independent claims and 9 claims total.
3. Drawings - 14 sheets of formal drawings containing 27 figures.

This application is being filed under the provisions of 37 C.F.R. § 1.53(f). Applicants await notification from the Patent and Trademark Office of the time set for filing the Declaration.

Applicants claim the right to priority based on Japanese Patent Application No. 11-170187, filed on June 16, 1999.

Please accord this application a serial number and filing date.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,  
GARRETT & DUNNER, L.L.P.

By: 

Richard V. Burgujian  
Reg. No. 31,744

RVB/FPD/dvz  
Enclosures

TITLE OF THE INVENTION

MUTUAL AUTHENTICATION METHOD, RECORDING APPARATUS,  
REPRODUCING APPARATUS, AND RECORDING MEDIUM

CROSS-REFERENCE TO RELATED APPLICATIONS

5           This application is based upon and claims the  
benefit of priority from the prior Japanese Patent  
Application No. 11-170187, filed June 16, 1999, the  
entire contents of which are incorporated herein by  
reference.

10           BACKGROUND OF THE INVENTION

          The present invention relates to a mutual  
authentication method for use among a recording  
apparatus, reproducing apparatus, and recording medium,  
using a contents management technique that protects  
15       copyrights by limiting the number of copied contents,  
and a recording apparatus, reproducing apparatus, and  
recording medium using the method.

          Conventionally, contents (literary works and the  
like) have undergone copy management. More  
20       specifically, by managing copy generations or the  
number of copies, copyright protection and use are  
balanced.

          On the other hand, the concept "move" has appeared  
as an alternative to copy management. "Copy" does not  
25       erase original data, but "move" transfers data to  
another location (recording medium) and erases original  
data. As a result, a protection technique against

03503364.051500

"move" has appeared. Such technique has emerged due to digitalization of contents and prevalence of networks and the like.

0593264.051500  
5 However, in recent years, since copies faithful to an original can be formed via the network or the like, it becomes difficult for the conventional technique to reliably protect copyrights. Particularly, it is hard to reliably protect copyrights against unlimited moves from medium to medium, e.g., profit-making distribution  
10 (by means of move) of data.

#### BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide a mutual authentication method which can assure high information security between a recording medium  
15 and a recording apparatus that records copied contents on the recording medium, and between a recording medium and a reproducing apparatus which reproduces copied contents recorded on the recording medium, and a contents recording apparatus, reproducing apparatus,  
20 and recording medium using the method.

According to one aspect of the present invention, there is provided a mutual authentication method for use between a recording apparatus which records copied contents on a recording medium having an arithmetic  
25 processing function, and the recording medium, the method comprising the steps of: storing in the recording medium at least first information which

depends on the recording medium, and second information which is to be shared by the recording apparatus in executing mutual authentication with the recording apparatus and depends on the recording medium; and  
5 generating by the recording apparatus authentication information used in mutual authentication with the recording medium on the basis of the first information obtained from the recording medium, and executing mutual authentication between the recording apparatus  
10 and the recording medium using the generated authentication information and the second information.

According to another aspect of the present invention, there is provided a mutual authentication method for use between a reproducing apparatus which  
15 reproduces copied contents recorded on a recording medium having an arithmetic processing function, and the recording medium, the method comprising the steps of: storing in the recording medium at least first information which depends on the recording medium, and  
20 second information which is to be shared by the reproducing apparatus in executing mutual authentication with the reproducing apparatus and depends on the recording medium; and generating by the reproducing apparatus authentication information used in mutual  
25 authentication with the recording medium on the basis of the first information obtained from the recording medium, and executing mutual authentication between the

09593864-061500

reproducing apparatus and the recording medium using the generated authentication information and the second information.

According to still another aspect of the present invention, there is provided a recording apparatus for recording copied contents on a recording medium while limiting the number of copied contents to be recorded on the recording medium, the apparatus comprising: generation means for generating authentication information, which is used in mutual authentication with the recording medium and is to be shared by the recording medium, on the basis of first information which is obtained from the recording medium and depends on the recording medium; and mutual authentication means for executing mutual authentication with the recording medium using the authentication information generated by the generation means.

According to still another aspect of the present invention, there is provided a reproducing apparatus for reproducing copied contents recorded on a recording medium while limiting the number of copied contents to be recorded on the recording medium, the apparatus comprising: generation means for generating authentication information, which is used in mutual authentication with the recording medium and is to be shared by the recording medium, on the basis of first information which is obtained from the recording medium

005033864-001500

and depends on the recording medium; and mutual authentication means for executing mutual authentication with the recording medium using the authentication information generated by the generation means.

5           According to still another aspect of the present invention, there is provided a recording medium having an arithmetic processing function, comprising: storage means for pre-storing first information which is unique to the recording medium, and second information which  
10   is to be shared by a recording apparatus for recording copied contents on the recording medium and a reproducing apparatus for reproducing the copied contents in executing mutual authentication among the recording medium, the recording apparatus, and the  
15   reproducing apparatus, and depends on the recording medium; and mutual authentication means for executing mutual authentication between the recording medium and the recording apparatus, and between the recording medium and the reproducing apparatus using authentication information generated based on the first  
20   information by the recording apparatus and the reproducing apparatus, and the second information.

          Additional objects and advantages of the invention will be set forth in the description which follows, and  
25   in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and

05503864-061500

obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated  
5 in and constitute a part of the specification,  
illustrate presently preferred embodiments of the  
invention, and together with the general description  
given above and the detailed description of the  
preferred embodiments given below, serve to explain the  
10 principles of the invention in which:

FIG. 1 is a block diagram showing an example of  
the arrangement of a music contents use management  
system (LCM) using a contents management technique for  
limiting the number of copied contents that can be  
15 recorded on a recording medium according to an  
embodiment of the present invention;

FIG. 2 shows an example of the map of a memory  
area;

FIG. 3 is a block diagram showing an example of  
20 the internal arrangement of a recording/reproducing  
device (PD);

FIGS. 4A to 4C are views for explaining the  
features of three different recording media;

FIG. 5 is a block diagram showing an example of  
25 the internal arrangement of a medium interface (I/F);

FIG. 6 is a view for explaining the recorded  
contents of a recording medium after check-in;

09503386.4 "06.1.500



FIGS. 7A to 7C show storage examples of guest books stored in a secret area of an LCM;

FIGS. 8A and 8B are views for explaining an outline of a mutual authentication method;

5        FIG. 9 is a flow chart for explaining a check-in/check-out process sequence;

FIG. 10 is a chart for explaining a sequence of check-out when the type of recording medium is level 2;

10        FIG. 11 is a chart for explaining a sequence of reproduction when the type of recording medium is level 2;

FIG. 12 is a chart for explaining a sequence of check-in when the type of recording medium is level 2;

15        FIG. 13 is a chart for explaining another sequence of check-out when the type of recording medium is level 2;

FIG. 14 is a chart for explaining another sequence of reproduction when the type of recording medium is level 2;

20        FIG. 15 is a chart for explaining a sequence of check-out when the type of recording medium is level 0;

FIG. 16 is a chart for explaining a sequence of reproduction when the type of recording medium is level 0;

25        FIG. 17 is a chart for explaining a sequence of check-in when the type of recording medium is level 0;

FIG. 18 is a chart for explaining another sequence

00503004.001500

of check-out when the type of recording medium is level 0;

FIG. 19 is a chart for explaining another sequence of reproduction when the type of recording medium is level 0;

FIG. 20 is a chart for explaining another sequence of check-in when the type of recording medium is level 0;

FIG. 21 is a chart for explaining processing operation of a mutual authentication process (AKE); and

FIG. 22 is a chart for explaining another processing operation of a mutual authentication process (AKE).

#### DETAILED DESCRIPTION OF THE INVENTION

An embodiment of the present invention will be explained hereinafter with reference to the accompanying drawings.

FIG. 1 shows an example of the arrangement of a music contents use management system (to be also simply referred to as an LCM hereinafter) which limits the number of copied contents that can be recorded on a recording medium according to this embodiment, and records copied contents on a medium, reproduces copied contents recorded on a medium, and so forth. Note that music is used as an example of contents. However, the present invention is not limited to such specific contents, and movies, game software programs, and the

like may be used. A memory card (MC) is used as a medium. However, the present invention is not limited to such medium, and various other recording media such as a floppy disk, DVD, and the like may be used.

5           An EMD (Electronic Music Distributor) is a music distribution server or music distribution broadcast station.

00593864-061500  
10           A contents use management system 1 is, for example, a personal computer (PC), which includes receivers #1 to #3 corresponding to a plurality of EMDs (EMD#1 to EMD#3 in this case), and receives encrypted contents, their licenses (the use condition and decryption key Kc for the encrypted contents), and the like distributed by the EMDs. Receivers #1 to #3 may have a reproducing  
15           function or a charging function. The user uses the reproducing function to listen to samples of the distributed music contents. Also, the user can purchase the contents he or she likes using the charging function.

20           The LCM 1 includes a secure contents server (Secure Music Server: SMS in this case; to be also simply referred to as an SMS hereinafter) 2, and the contents the user has purchased are stored in the SMS 2 via an EMD interface (I/F) 3. The music contents are  
25           decrypted by the EMD I/F 3 as needed, and undergo format conversion and re-encryption. Upon receiving the encrypted contents, the SMS 2 stores the received

contents in a music data memory 10, and a music data decryption key in a license memory 9. The SMS 2 may have a reproducing function. With this reproducing function, the music contents managed by the SMS 2 can be reproduced on the PC.

The SMS 2 has a function of outputting contents data to a medium (to be also simply referred to as an MC (memory card) hereinafter) 13. The user can reproduce the contents recorded on the MC 13 by setting it in a recording/reproducing device (to be also simply referred to as a PD (Portable Device) hereinafter).

The SMS 2 records contents on the MC 13 directly via a medium (MC) interface 6 or with the intervention of the PD 12.

A device ID memory 4 includes, e.g., a ROM which stores identification information (device ID) of the LCM.

The MC 13 has identification information (MID) which is unique to that medium and cannot be rewritten, and the contents stored in the MC 13 may be encrypted by an encryption key which depends on the MC 13.

A check-in/check-out process will be explained first using the LCM 1 shown in FIG. 1.

The check-out process means making a copy of "parent" contents stored in the LCM 1 on the MC 13 as "child" contents. The "child" contents can be freely reproduced by the PD 12, but it is not allowed to form

00503864-061500

"grandchild" contents from the "child". The number of "children" "parent" can have is defined as an attribute of "parent". On the other hand, the check-in process means erasing (or disabling to use) "child" contents by the LCM 1 when the MC 13 is connected to the LCM 1, thereby recovering the right of "parent" contents in the LCM 1 to form one "child". This process is also called check-in at "parent".

When this check-in/check-out process is simply implemented by the conventional LCM 1, the following "attack" is present in practice. More specifically, "child" stored in the MC 13 is saved in another recording medium (by removing its MID), and "child" in the MC 13 checks in at "parent". The previously saved "child" is written back to that MC 13. Since check-in has already been done, "parent" on the LCM 1 can copy "child" on another MC 13. This method can form an arbitrary number of "children" that can be used.

The aforementioned "attack" can be defended by authentication in data transfer between the MC 13 and LCM 1. That is, assume that the MC 13 does not accept data transfer from an LCM other than an authentic LCM 1, and the LCM 1 does not accept data transfer from an MC other than an authentic MC 13. In this case, "child" in the MC 13 cannot be saved in another recording medium. Also, disguised check-in cannot be done at the LCM 1. Therefore, the aforementioned "attack" is no

0503064-061500

longer effective.

However, the check-in/check-out process cannot be implemented even under the premise of authentication between the LCM 1 and MC 13, because of the presence of the following "attack". That is, before "parent" on the LCM 1 forms any "child", data of the LCM 1 (especially, information in the license memory 9) is backed up to another recording medium. After "child" is copied to the MC 13, the backed-up data of the LCM 1 is restored. Since "parent" of the LCM 1 recovers the state before it forms "child", it can form "child" on another MC 13. In this manner, an arbitrary number of "children" can be formed.

In order to implement the check-in/check-out process that can defend such attack, an area (secret area) which cannot be accessed by a public procedure is assured on the storage area of the MC 13, and is used to record information required for mutual authentication and information required for contents decryption, an identification information (device ID) list (revocation list (RVC list)) of devices (LCM 1, PD 12) that cannot be accessed, and the like (see FIG. 2). Also, an area (secret area) that can be accessed by only a private procedure is assured on the storage area (e.g., a hard disk (HDD) when the LCM 1 is constituted by a PC) of the LCM 1, and is used to store a guest book (to be described later) (see FIG. 2). Furthermore,

00503864-061500

an area (secret area) that can be accessed by only a private procedure may also be assured on the storage area of the PD 12, and may be used to record information required for contents decryption (see  
5 FIG. 2). Note that an area other than the secret area in the storage area, which can be accessed by a normal procedure, will be referred to as a public area.

As shown in FIG. 1, the LCM 1 includes a guest book memory 8 assured on the secret area, and a secret  
10 area driver 7 for reading data from the secret area after the SMS 2 executes a specific secret procedure for accessing this guest book memory 8.

As shown in FIG. 4C, the MC 13 includes an identification information memory (ROM) 13b which  
15 stores identification information MID of the MC 13, and cannot be externally rewritten and copied, a secret area 13c, a public area (rewritable RAM) 13a, and a switch (SW) 13e which opens a gate to allow access to the secret area 13c only when an authentication unit  
20 13d authenticates and confirms an authentic partner every time the secret area 13c is accessed.

Note that three different types of MCs 13 can be used in this embodiment. The type of MC 13 which has both identification information MID and the secret area,  
25 as shown in FIG. 4C, is called "level 2". The type of MC 13 which does not have any secret area but has identification information MID, as shown in FIG. 4B, is

0503004-061500

called "level 1". The type of MC 13 which has neither the secret area nor identification information, and has only a public area, as shown in FIG. 4A, is called "level 0". In order to discriminate these types, for example, level 0 can be discriminated from other types by checking the presence/absence of identification information MID, and levels 1 and 2 can be discriminated based on the format of identification information MID. For example, when identification information is a serial number, a medium having identification information equal to or larger than a predetermined value is determined to be level 2.

An MC 13 of level 2 will be exemplified below unless otherwise specified.

The MC 13 is set in the PD 12 connected to the LCM 1 or is directly set in the LCM 1 when it is used.

FIG. 3 shows an example of the arrangement of the PD 12, and the MC 13 is set in a medium interface (I/F) 12f. When the LCM 1 reads/writes data to/from the MC 13 via the PD 12, it accesses the secret area of the MC 13 via a secret area access unit in the PD 12. The medium I/F 12f includes a secret area access unit for accessing the secret area of the MC 13. The secret area in the PD 12 may be assured on a flash memory 12d. A ROM 12c is written with a mutual authentication program between the MC 13 and LCM 1, a program that describes an authentication procedure required for



accessing the secret area, and a program for  
discriminating the type of MC 13. According to these  
programs, various processes such as authentication,  
type discrimination, and the like with the MC 13 are  
5 executed under the control of a CPU 12a.

The ROM 12c may also store identification  
information (device ID) of the PD 12. For example, the  
secret area assured on the flash memory 12d pre-stores  
a secret device ID (SPDID).

10 FIG. 5 shows the arrangement of the medium I/F 6  
of the LCM 1. The medium I/F 6 includes an  
authentication unit 6c for performing mutual  
authentication with the MC 13, a medium discrimination  
unit 6b for determining the type of MC 13, and a  
15 controller 6a for controlling all these units. The  
authentication unit 6c also serves as a secret area  
access unit which accesses the secret area of the MC 13.

The guest book stored in the secret area of the  
LCM 1 will be explained below.

20 All music contents held in the SMS 2 have contents  
IDs (TIDs) as identification information for  
identifying the individual contents, and the  
predetermined number of contents that can be copied,  
i.e., the remaining number of children and a check-out  
25 list as their attribute information. This attribute  
information is called a guest book. The guest book is  
recorded on the guest book memory 8 assured on the

00503664.061500

5

10

15

20

- 25

1. Outline of mutual authentication method

In order to safely implement the check-in/check-out process, mutual authentication must be done among the LCM 1, PD 12, and MC 13 as described above (to confirm, e.g., if they have an identical algorithm). In general, the mutual authentication process must have secret information shared by the partners which are to authenticate each other.

Therefore, for example, the MC 13, LCM 1, and PD 12

have such secret information. In terms of information security, this secret information is preferably a dynamic one which is generated to have a different value every time authentication is done. However, if  
5 a high-grade function of generating such secret information is added to the medium itself, i.e., the MC 13, the medium becomes expensive. In order to promote further prevalence of media to public, the medium is preferably as inexpensive as possible. Therefore,  
10 secret information is preferably pre-stored in the MC 13 to reduce the cost of the medium (MC 13).

However, when secret information which is common to all media or a given number of media (such information will be referred to as global secret  
15 information hereinafter) is pre-stored in respective media, if the secret information is read from a given medium by some method, other media that store identical secret information may be illicitly used. It is therefore very dangerous to store global secret  
20 information in media (see FIG. 8A).

Even when secret information stored in a given medium is read by an unauthorized user, if it is only the medium from which the secret information has been read that can be illicitly used, no serious problem is  
25 posed. For this reason, the secret information need only be unique to each medium.

In this embodiment, secret information for mutual

005030001.061500

authentication, which information differs in units of media, is stored in each media, and the LCM 1 or PD 12 and MC 13 perform mutual authentication using the stored information, thereby providing a safe mutual authentication method that uses a low-cost medium and can assure higher security. More specifically, the mutual authentication method described in this embodiment pre-stores, in (the secret area of) each medium (medium of level 2), secret information (in this case, secret medium ID (SMID): which is obtained by encrypting a medium ID using key information  $K_M$  acquired by some method), which differs in units of media and is required for mutual authentication (AKE), and transfers identification information (MID) of that medium to the LCM 1 and PD 12, as shown in FIG. 8B. The LCM 1 or PD 12 generates information (which is the same as SMID of the medium) for mutual authentication) using MID and information ( $K_M$ ) acquired by some method in accordance with a predetermined algorithm and executes a mutual authentication process (AKE: authentication and key exchange)).

In this manner, by storing unique secret information (SMID) in each MC 13, the LCM 1 or PD 12 generates secret information (SMID) on the basis of information (MID) unique to each medium, which is transferred from the medium, thereby implementing safe mutual authentication without imposing any heavy load

on the medium.

Note that the mutual authentication process according to the gist of the present invention will be referred to as AKE hereinafter.

5           When the MC 13 is set in the medium I/F 6 of the LCM 1 or the PD 12, mutual authentication may be done first between the medium I/F 6 and MC 13 or between the PD 12 and MC 13 (step S1 in FIG. 9). If it is determined that both of them are authentic (e.g., they  
10           have hardware arrangements complying with the same standards) (step S2), the medium I/F 6 or PD 12 determines the type of MC 13 on the basis of identification information MID read from the MC 13 (step S3). The medium I/F 6 or PD 12 executes a  
15           check-in/check-out/reproduction process according to the determined type (step S6).

Note that mutual authentication in step S1 in FIG. 9 need not always be that according to the gist of the present invention shown in FIG. 8B.

20           In the above description, three different types of MCs 13, i.e., MCs 13 of level 0 to level 2, are available, but the check-in/check-out/reproduction process operations of the copied contents in FIG. 9 and the subsequent figures will be explained for two types  
25           of MCs 13, i.e., MCs 13 of level 0 and level 2.

Furthermore, in accessing each others secret areas between the LCM 1 and MC 13, the LCM 1 and PD 12, and

00503867-061500

the PD 12 and MC 13, assume that they authenticate each other, open gates to each other's secret areas if it is confirmed that they are authentic, and close the gates that allow access to the secret areas (although not described in the following description) after access to the secret areas is completed. For example, between the LCM 1 and MC 13, the SMS 2 makes mutual authentication with the MC 13 so as to access the secret area 13c of the MC 13. If their authenticity is confirmed and the switch 13e opens the gate to the secret area 13c, the SMS 2 writes key information in the secret area 13c, and the switch 13e closes the gate that allows access to the secret area 13c upon completion of the write.

2. Check-in/check-out/reproduction process of copied contents using MC of level 2

The check-in/check-out/reproduction process using the MC 13 of level 2 with the format shown in FIG. 4C will be explained below.

A case will be explained below with reference to FIG. 10 wherein a check-out instruction is issued to the SMS 2 via a user interface (I/F) 15 or via the PD 12 (i.e., when the MC 13 is set in the PD 12 connected to the LCM 1).

The SMS 2 checks the remaining number n of children of contents (e.g., having a contents ID = "TID1") corresponding to a check-out request of the

00503364-061500

guest book. If  $n > 0$ , the SMS 2 reads out the device ID (LCMID) of the corresponding LCM 1 from the device ID memory 4, and transfers it to the MC 13 (step S101).

5 The MC 13 checks if the transferred device ID is registered in the RVC list (step S102). If the transferred device ID is not registered, the MC 13 reads out master key  $K_M$  by accessing the secret area 13c, and transfers it to the LCM 1 (step S103). Furthermore, the MC 13 reads out its identification  
10 information (MID) from the identification information memory 13b and transfers it to the LCM 1 (step S104).

The LCM 1 encrypts the medium ID (MID) transferred from the MC 13 using master key  $K_M$  to generate information ( $K_M[MID]$ ) required for a mutual  
15 authentication process (AKE) (step S105).

The LCM 1 executes the mutual authentication process (AKE) using the generated information  $K_M[MID]$ , while the MC 13 executes the mutual authentication process (AKE) using a secret medium ID (SMID) (step  
20 S106). In this mutual authentication process (AKE), the LCM 1 and MC 13 share identical functions  $g(x, y)$  and  $H(x, y)$ , and if the information  $K_M[MID]$  generated by the LCM 1 is the same as the secret medium ID (SMID) of the MC 13, they can confirm their authenticity by  
25 the mutual authentication process (AKE).

The processing operation of the mutual authentication process (AKE) in step S106 will be

explained below with reference to FIG. 21.

5 The LCM 1 generates random number R1 (step S301), and transfers it to the MC 13. At the same time, the LCM 1 substitutes random number R1 in one variable of function  $g(x, y)$  having two variables. Also, the LCM 1 substitutes the information  $K_M[MID]$  generated in step S105 in FIG. 10 in the other variable of function  $g(x, y)$  to obtain the value of function  $g$  (step S302).

10 On the other hand, the MC 13 substitutes random number R1 transferred from the LCM 1 in one variable of function  $g(x, y)$ , substitutes its own secret medium ID (SMID) in the other variable, and transfers the obtained value of function  $g$  to the LCM 1 (step S303).

15 The LCM 1 compares the value of function  $g$  transferred from the MC 13, and that computed by itself, and executes a subsequent process if they match. If the two values do not match, the AKE process on the LCM 1 side is canceled at that time (step S304).

20 The MC 13 then generates random number R2 (step S305), and transfers it to the LCM 1. At the same time, the MC 13 substitutes random number R2 in one variable of function  $g(x, y)$  having two variables. Also, the MC 13 substitutes its secret medium ID (SMID) in the other variable of function  $g(x, y)$  to obtain the value of function  $g$  (step S306).

25 On the other hand, the LCM 1 substitutes random number R2 transferred from the MC 13 in one variable of



function  $g(x, y)$ , and substitutes the information  $K_M[MID]$  generated in step S105 in FIG. 10 in the other variable of function  $g(x, y)$  to obtain the value of function  $g$ . The LCM 1 then transfers the obtained  
5 value to the MC 13 (step S307).

The MC 13 compares the value of function  $g$  transferred from the LCM 1, and that computed by itself, and executes a subsequent process if they match. If the two values do not match, the AKE process on the MC  
10 13 side is canceled at that time (step S308).

If the values of function  $g$  match in step S308, the MC 13 substitutes random number  $R2$  in one variable of function  $H(x, y)$  having two variables, and its secret medium ID (SMID) in the other variable to  
15 generate key information  $KT$  (step S309).

Also, if the values of function  $g$  match in step S304, the LCM 1 substitutes random number  $R2$  transferred from the MC 13 in one variable of function  $H(x, y)$ , and substitutes the information  $K_M[MID]$  generated in step S105 in FIG. 10 in the other variable  
20 to generate key information  $KT$  (step S310).

Note that two pieces of key information  $KT$ , which are generated by the LCM 1 and MC 13 using the identical function  $H(x, y)$  if it is determined in  
25 steps S304 and S308 that the values of function  $g$  match, are the same ones. The LCM 1 and MC 13 then exchange contents decryption key  $K_c$  using this key

005070004-061500

information KT.

The mutual authentication process (AKE) preferably generates different key information KT in each authentication in terms of security. In this case, since random number R2 newly generated for each authentication is substituted in one of two variables which are substituted in function H used to generate key information KT, different key information KT can be generated for each authentication.

Referring back to FIG. 10, if the LCM 1 and MC 13 confirm in step S106 that they are authentic, the MC 13 stores the generated key information KT (in this case, KT1) in the secret area (step S107). The LCM 1 encrypts a decryption key (contents decryption key) Kc used to decrypt the encrypted contents (KT1[Kc]) using the key information KT1 generated in step S106, and transfers it to the MC 13 (steps S108 and S109). Also, the LCM 1 encrypts contents C using Kc (Kc[C]), and transfers the encrypted contents to the MC 13 (steps S110 and S111).

Finally, the SMS 2 subtracts "1" from the remaining number n of children of the contents with the contents ID = "TID1" corresponding to the check-out request of the guest book, and adds identification information "m0" of that MC 13 in check-out list L1, as shown in FIG. 7B.

The MC 13 stores transferred encrypted contents

decryption key  $K_{T1}[K_c]$  and encrypted contents  $K_c[C]$  in the public area 13a.

FIG. 6 shows the storage contents of the MC 13 at completion of the aforementioned processes.

5        A case will be explained below with reference to FIG. 11 wherein a reproduction instruction is issued to the SMS 2 via the user interface (I/F) 15 of the LCM 1 or to the PD 12.

10        The PD 12 or LCM 1 transfers its own device ID to the MC 13 (step S121).

15        If the LCM 1 has the same contents reproducing function (demodulator 12g, decoder 12h, D/A converter 12i, and the like) as that the PD 12 shown in FIG. 3, the contents of the MC 13 can be similarly reproduced by the PD 12 and LCM 1. A reproduction process by the PD 12 will be exemplified below.

20        The MC 13 checks if the transferred device ID is registered in the RVC list (step S122). If the device ID is not registered, the MC 13 reads out master key  $K_M$  by accessing the secret area 13c, and transfers it to the PD 12 (step S123). Furthermore, the MC 13 reads out its identification information (MID) from the identification information memory 13b and transfers it to the PD 12 (step S124).

25        The PD 12 encrypts the medium ID (MID) transferred from the MC 13 using master key  $K_M$  to generate information ( $K_M[MID]$ ) required for a mutual

005030864.061500

authentication process (AKE) (step S125).

5 The PD 12 executes the mutual authentication process (AKE) using the generated information  $K_M[MID]$ , while the MC 13 executes the mutual authentication process (AKE) using a secret medium ID (SMID) (step S126). Since the mutual authentication process in step S126 is the same as that shown in FIG. 21, a description thereof will be omitted.

10 If the PD 12 and MC 13 confirm that they are authentic, the MC 13 encrypts key information  $KT1$  stored in the secret area 13c using the generated key information  $KT$  (in this case,  $KT2$ ) ( $KT2[KT1]$ ) and transfers it to the PD 12 (steps S127 and S128). On the other hand, the PD 12 can decrypt  $KT2[KT1]$   
15 transferred from the MC 13 using key information  $KT2$  generated in step S126 (step S128).

20 The MC 13 reads out encrypted contents decryption key  $KT1[Kc]$  and encrypted contents  $Kc[C]$  from the public area 13a and transfers them to the PD 12 (steps S129 and S131).

25 If key information  $KT1$  has been successfully decrypted, the PD 12 can obtain contents decryption key  $Kc$  by decrypting contents decryption key  $KT1[Kc]$  which was encrypted using  $KT1$  (step S130). Accordingly, it decrypts encrypted contents  $Kc[C]$  using that contents decryption key  $Kc$  to obtain contents  $C$  (step S132). In the PD 12, the decoder 12h decodes contents  $C$ , and the

D/A converter 12i converts the decoded contents from a digital signal into an analog signal, thereby reproducing the copied contents (e.g., music) recorded on the MC 13.

5           A case will be explained below with reference to FIG. 12 wherein a check-in instruction is issued to the SMS 2 via the user interface (I/F) 15 of the LCM 1 or via the PD 12 (i.e., when the MC 13 is set in the PD 12 connected to the LCM 1).

10           The SMS 2 reads out the device ID (LCMID) of that LCM 1 from the device ID memory 4, and transfers it to the MC 13 (step S141).

            The MC 13 checks if the transferred device ID is registered in the RVC list (step S142). If the  
15           transferred device ID is not registered, the MC 13 reads out master key  $K_M$  by accessing the secret area 13c, and transfers it to the LCM 1 (step S143). Furthermore, the MC 13 reads out its identification information (MID) from the identification information  
20           memory 13b and transfers it to the LCM 1 (step S144).

            The LCM 1 encrypts the medium ID (MID) transferred from the MC 13 using master key  $K_M$  to generate information ( $K_M[MID]$ ) required for a mutual authentication process (AKE) (step S145).

25           The LCM 1 executes the mutual authentication process (AKE) using the generated information  $K_M[MID]$ , while the MC 13 executes the mutual authentication

00503064 061500

process (AKE) using a secret medium ID (SMID) (step S146).

The mutual authentication process (AKE) of step S146 in check-in will be explained below with reference to FIG. 22. Note that the same reference numerals denote the same portions as those in FIG. 21, and only different portions will be explained below. That is, in FIG. 22 if it is determined in step S308 that the values of function g match, the value of flag information Fake is set to be "true" (indicated by "T" in FIG. 22) in place of generating key information KT; if they do not match, the value of flag information Fake is set to be "false" (indicated by "F" in FIG. 22) (steps S321 and S322). If the values of function g match in step S304, the LCM 1 outputs only that determination result in place of generating key information KT.

Referring back to FIG. 12, if the LCM 1 confirms authenticity of the MC 13 in step S146 (step S304 in FIG. 22), it instructs the MC 13 to delete key information KT1 stored in the secret area 13c of the MC 13. Upon receiving this instruction, the MC 13 checks the value of flag information Fake. If Fake = "T", the MC 13 deletes key information KT1 from the secret area 13c, and rewrites flag information Fake to "F" (steps S147 and S148). At this time, the encrypted contents stored in the public area 13a of the MC 13 may be

00503664-061500

erased by overwriting random numbers generated by the LCM 1 on them.

Finally, as shown in FIG. 7C, the SMS 2 adds "1" to the remaining number n of the contents with the contents ID = "TID1" corresponding to the check-in request of the guest book, and deletes identification information m0 of that MC 13 from check-out list L1.

On the other hand, if the value of flag information Fake is "F", the subsequent process is canceled.

The processing operation in check-out, which is different from that shown in FIG. 10, will be described below with reference to FIG. 13. Note that the same reference numerals denote the same portions as those in FIG. 10, and only different portions will be explained below. That is, FIG. 13 is characterized by a process for contents decryption key Kc to be transferred to the MC 13.

Referring to FIG. 13, the LCM 1 encrypts contents decryption key Kc using  $K_M[MID]$  (to be expressed by w hereinafter) generated in step S105 (step S162). The LCM 1 further encrypts contents decryption key Kc encrypted by w ( $w[Kc]$ ) using key information KT1 generated in the mutual authentication process (AKE) in step S106 ( $KT1[w[Kc]]$ ), and then transfers it to the MC 13 (step S163).

The MC 13 decrypts the transferred  $KT1[w[Kc]]$

00503864-061500

using key information KT1 generated in the mutual authentication process (AKE) in step S106 to obtain  $w[Kc]$ , and stores it in the secret area 13c (step S164).

5       Contents C are encrypted using Kc (step S165), and are then transferred to the MC 13 (step S166) as in FIG. 10.

00593864.061500

10       The reproduction process corresponding to the check-out process shown in FIG. 13 will be explained below with reference to FIG. 14. Note that the same reference numerals denote the same portions as those in FIG. 11, and only different portions will be explained below. More specifically, in FIG. 14 the MC 13 encrypts encrypted contents decryption key  $w[Kc]$  stored in the secret area 13c using key information KT2

15       generated in the mutual authentication process (AKE) in step S126 ( $KT2[w[Kc]]$ ), and then transfers it to the LCM 1 or PD 12 (step S172). The LCM 1 or PD 12 decrypts  $KT2[w[Kc]]$  transferred from the MC 13 using key information KT2 generated in step S126 (step S173),

20       and decrypts the obtained  $w[Kc]$  using  $w = K_M[KID]$  generated in step S123 to obtain contents decryption key Kc (step S174). The LCM 1 or PD 12 decrypts encrypted contents  $Kc[C]$  using this contents decryption key Kc to obtain contents C (step S175). In the LCM 1

25       or PD 12, the decoder 12h decodes contents C, and the D/A converter 12i converts the decoded contents from a digital signal into an analog signal, thereby



reproducing the copied contents (e.g., music) recorded on the MC 13.

5 The check-in process corresponding to the check-out process shown in FIG. 13 is substantially the same as that described with reference to FIG. 12, except that contents decryption key  $w[K_c]$  encrypted by  $w = K_M[MID]$  is deleted from the secret area 13c of the MC 13 in step S148 in place of key information KT1.

10 3. Check-in/check-out/reproduction process of copied contents using MC of level 0

The check-in/check-out and reproduction processes using the MC 13 of level 0 with the format shown in FIG. 4A will be explained below.

15 In this case, the MC 13 is set in the PD 12, and executes a check-out process with the LCM 1 via the PD 12. The basic operation is the same as that of the MC 13 of level 2. However, in case of level 0, since the MC 13 has neither a secret area nor a medium ID, the PD 12 executes a process shown in FIG. 10 with respect to  
20 the LCM 1 in place of the MC 13 of level 0. For this purpose, the secret area of the PD 12 pre-stores master key  $K_M$ , secret device key SPDID, and a revocation list (RVC list). Note that master key  $K_M$  need only have the same function as that of master key  $K_M$  stored in the MC  
25 13, but data itself need not be the same.

In step S3 in FIG. 9, the type of MC 13 is determined to be level 0.

00503064-061500

5           The SMS 2 checks the remaining number n of  
children of contents (e.g., having a contents ID =  
"TID1") corresponding to a check-out request of the  
guest book. If  $n > 0$ , the SMS 2 reads out the device  
ID (LCMID) of the corresponding LCM 1 from the device  
10 ID memory 4, and transfers it to the PD 12 (step S201).

The LCM 1 encrypts the device ID (PDID) transferred from the PD 12 using master key  $K_M$  to generate information ( $K_M[PDID]$ ) required for a mutual authentication process (AKE) (step S205).

The LCM 1 executes the mutual authentication process (AKE) using the generated information  $K_M[PDID]$ , while the PD 12 executes the mutual authentication process (AKE) using a secret device ID (SPDID) (step S206). Since the mutual authentication process in step

S206 is the same as that shown in FIG. 21, a description thereof will be omitted.

00503864.061500

5 If the LCM 1 and MC 13 confirm that they are authentic, the PD 12 stores the generated key information KT (in this case, KT1) in the secret area (step S207). The LCM 1 encrypts a decryption key (contents decryption key) Kc used to decrypt the encrypted contents (KT1[Kc]) using the key information KT1 generated in step S206, and transfers it to the MC 10 13 via the PD 12 (steps S208 and S209). Also, the LCM 1 encrypts contents C using Kc (Kc[C]), and transfers the encrypted contents to the MC 13 via the PD 12 (steps S210 and S211).

15 Finally, the SMS 2 subtracts "1" from the remaining number n of children of the contents with the contents ID = "TID1" corresponding to the check-out request of the guest book, and adds identification information "m0" of that MC 13 in check-out list L1, as shown in FIG. 7B.

20 The MC 13 stores transferred encrypted contents decryption key KT1[Kc] and encrypted contents Kc[C] in the public area 13a.

FIG. 6 shows the storage contents of the MC 13 at completion of the aforementioned processes.

25 The processing operation between the PD 12 and MC 13 when the PD 12 receives a reproduction instruction will be explained below with reference to FIG. 16.

05030304 061500

The MC 13 transfers encrypted contents decryption key  $KT1[Kc]$  recorded on its public area to the PD 12 (step S221). If the PD 12 is the one which was used to check out the contents to be reproduced with respect to the MC 13, it must store key information  $KT1$  for decrypting the encrypted contents decryption key in its secret area (see step S207 in FIG. 15). Therefore, such authentic PD 12 can obtain contents decryption key  $Kc$  by decrypting  $KT1[Kc]$  transferred from the MC 13 using key information  $KT1$  read out from its secret area (step S222). Furthermore, the PD can obtain contents  $C$  by decrypting encrypted contents  $Kc[C]$  transferred from the MC 13 using that contents decryption key  $Kc$  (steps S223 and S224). In the PD 12, the decoder 12h decodes contents  $C$ , and the D/A converter 12i converts the decoded contents from a digital signal into an analog signal, thereby reproducing the copied contents (e.g., music) recorded on the MC 13.

A case will be explained below with reference to FIG. 17 wherein a check-in instruction is issued to the SMS 2 via the PD 12 (i.e., using the MC 13 set in the PD 12 connected to the LCM 1). In this case as well, the PD 12 executes a process shown in FIG. 12 with respect to the LCM 1 in place of the MC 13 of level 0 as in the check-out process.

The SMS 2 reads out the device ID (LCMID) of that LCM 1 from the device ID memory 4, and transfers it to

the PD 12 (step S231).

The PD 12 checks if the transferred device ID is registered in the RVC list (step S232). If the transferred device ID is not registered, the PD 12  
5 reads out master key  $K_M$  by accessing its secret area, and transfers it to the LCM 1 (step S233). Furthermore, the PD 12 reads out its identification information (PDID) and transfers it to the LCM 1 (step S234).

The LCM 1 encrypts the device ID (PDID)  
10 transferred from the PD 12 using master key  $K_M$  to generate information ( $K_M[PDID]$ ) required for a mutual authentication process (AKE) (step S235).

The LCM 1 executes the mutual authentication process (AKE) using the generated information  $K_M[PDID]$ ,  
15 while the PD 12 executes the mutual authentication process (AKE) using a secret device ID (SPDID) (step S236).

Since the mutual authentication process (AKE) of step S236 in check-in is substantially the same as that  
20 shown in FIG. 22 except that  $K_M[PDID]$  replaces  $K_M[MID]$ , and the secret device ID (SPDID) replaces the secret medium ID (SMID), a description thereof will be omitted.

If the LCM 1 confirms authenticity of the PD 12 in step S236 (step S304 in FIG. 22), it instructs the PD  
25 12 to delete key information  $KT1$  stored in its secret area. Upon receiving this instruction, the PD 12 checks the value of flag information Fake. If

Fake = "T", the PD 12 deletes key information KT1 from its secret area, and rewrites flag information Fake to "F" (steps S237 and S238). At this time, the encrypted contents stored in the public area 13a of the MC 13 may  
5 be erased by overwriting random numbers generated by the LCM 1 on them.

Finally, as shown in FIG. 7C, the SMS 2 adds "1" to the remaining number n of the contents with the contents ID = "TID1" corresponding to the check-in  
10 request of the guest book, and deletes identification information m0 of that MC 13 from check-out list L1.

On the other hand, if the value of flag information Fake is "F", the subsequent process is canceled.

15 The processing operation in check-out, which is different from that shown in FIG. 15, will be described below with reference to FIG. 18. Note that the same reference numerals denote the same portions as those in FIG. 15, and only different portions will be explained  
20 below. That is, FIG. 18 is characterized by a process for contents decryption key Kc to be transferred to the PD 12, as in FIG. 13.

Referring to FIG. 18, the LCM 1 encrypts contents decryption key Kc using  $K_M[PDID]$  (to be expressed by w hereinafter) generated in step S205 (step S252). The  
25 LCM 1 further encrypts contents decryption key Kc encrypted by w ( $w[Kc]$ ) using key information KT1

00503364 061500

5     using key information KTI generated in the mutual  
authentication process (AKE) in step S251 to obtain  
w[Kc], and stores it in the secret area (step S254).

The reproduction process corresponding to the check-out process shown in FIG. 18 will be explained below with reference to FIG. 19. Note that the same reference numerals denote the same portions as those in FIG. 18, and only different portions will be explained below. More specifically, in FIG. 19 the PD 12 can obtain contents decryption key Kc by decrypting encrypted contents decryption key w[Kc] stored in its secret area using its secret device ID (SPDID = w)

20 (step S261). The PD 12 can obtain contents C by  
decrypting encrypted contents Kc[C] transferred from  
the MC 13 using that contents decryption key Kc (step  
S262). In the PD 12, decoder 12h decodes contents C,  
and the D/A converter 12i converts the decoded contents  
25 from a digital signal into an analog signal, thereby  
reproducing the copied contents (e.g., music) recorded  
on the MC 13.

5 The check-in process corresponding to the  
check-out process shown in FIG. 18 will be described  
below with reference to FIG. 20. Note that the  
description of FIG. 20 is substantially the same as  
that of FIG. 17, except that contents decryption key  
w[Kc] encrypted by  $w = K_M[PDID]$  is deleted from the  
secret area of the PD 12 in step S238 in place of key  
information KTL.

10 As described in detail above, according to the  
present invention, safe mutual authentication with high  
security can be implemented using a low-cost recording  
medium.

15 Additional advantages and modifications will  
readily occur to those skilled in the art. Therefore,  
the invention in its broader aspects is not limited to  
the specific details and representative embodiments  
shown and described herein. Accordingly, various  
modifications may be made without departing from the  
spirit or scope of the general inventive concept as  
20 defined by the appended claims and their equivalents.

00503001 001500



WHAT IS CLAIMED IS:

1. A mutual authentication method for use between  
a recording apparatus which records copied contents on  
a recording medium having an arithmetic processing  
5 function, and the recording medium, said method  
comprising the steps of:

storing in the recording medium at least first  
information which depends on the recording medium, and  
second information which is to be shared by the  
10 recording apparatus in executing mutual authentication  
with the recording apparatus and depends on the  
recording medium; and

generating by the recording apparatus  
authentication information used in mutual  
15 authentication with the recording medium on the basis  
of the first information obtained from the recording  
medium, and executing mutual authentication between the  
recording apparatus and the recording medium using the  
generated authentication information and the second  
20 information.

2. The method according to claim 1, further  
comprising the step of:

generating the authentication information by  
encrypting the first information using an encryption  
25 key obtained from the recording medium.

3. A mutual authentication method for use between  
a reproducing apparatus which reproduces copied

0953564-051500

storing in the recording medium at least first information which depends on the recording medium, and second information which is to be shared by the reproducing apparatus in executing mutual authentication with the reproducing apparatus and depends on the recording medium; and

10           generating by the reproducing apparatus  
authentication information used in mutual  
authentication with the recording medium on the basis  
of the first information obtained from the recording  
medium, and executing mutual authentication between the  
15   reproducing apparatus and the recording medium using  
the generated authentication information and the second  
information.

4. The method according to claim 3, further comprising the step of:

20           generating the authentication information by  
          encrypting the first information using an encryption  
          key obtained from the recording medium.

5. A recording apparatus for recording copied contents on a recording medium while limiting the number of copied contents to be recorded on the recording medium, said apparatus comprising:

generation means for generating authentication



8. An apparatus according to claim 7, wherein said generation means generates the authentication information by encrypting the first information using an encryption key obtained from the recording medium.

5 9. A recording medium having an arithmetic processing function, comprising:

storage means for pre-storing first information which is unique to said recording medium, and second information which is to be shared by a recording apparatus for recording copied contents on said recording medium and a reproducing apparatus for reproducing the copied contents in executing mutual authentication among the recording medium, the recording apparatus, and the reproducing apparatus, and depends on said recording medium; and

10  
15

mutual authentication means for executing mutual authentication between the recording medium and the recording apparatus, and between the recording medium and the reproducing apparatus using authentication information generated based on the first information by the recording apparatus and the reproducing apparatus, and the second information.

20

00503864 061500

ABSTRACT OF THE DISCLOSURE

In a mutual authentication method for use between  
a recording apparatus which records copied contents on  
a recording medium having an arithmetic processing  
5 function, and the recording medium, the method includes  
a step of storing in the recording medium at least  
first information which depends on the recording medium,  
and second information which is to be shared by the  
recording apparatus in executing mutual authentication  
10 with the recording apparatus and depends on the  
recording medium, and a step of generating by the  
recording apparatus authentication information used in  
mutual authentication with the recording medium on the  
basis of the first information obtained from the  
15 recording medium, and executing mutual authentication  
between the recording apparatus and the recording  
medium using the generated authentication information  
and the second information.

00533034-001500

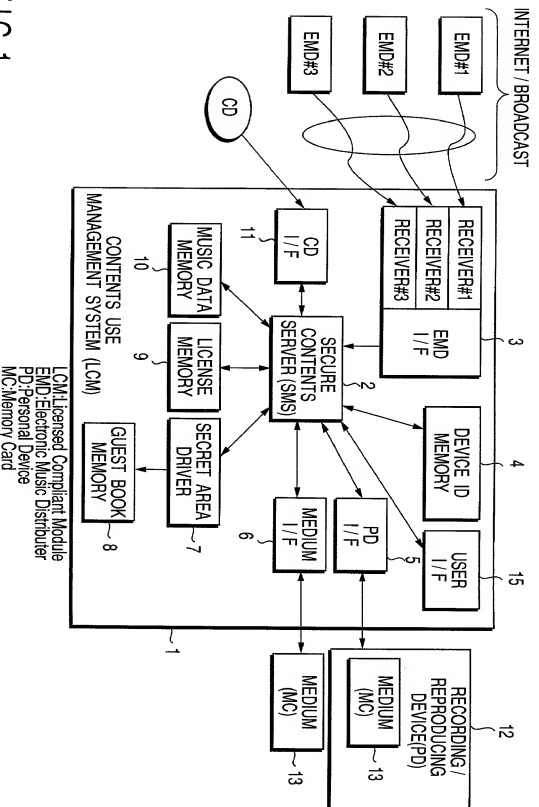


FIG. 1

005190 1000000

MEMORY AREA (LCM,PD,MC)




FIG. 2

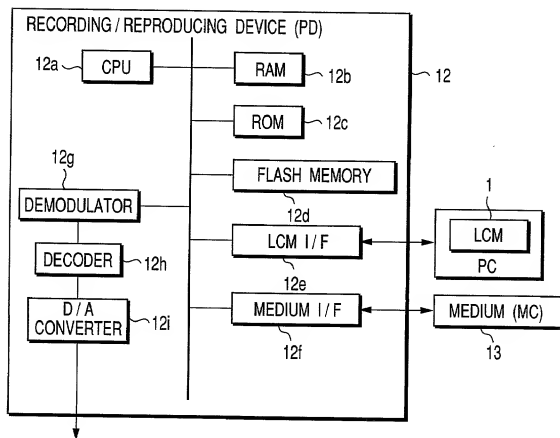


FIG. 3





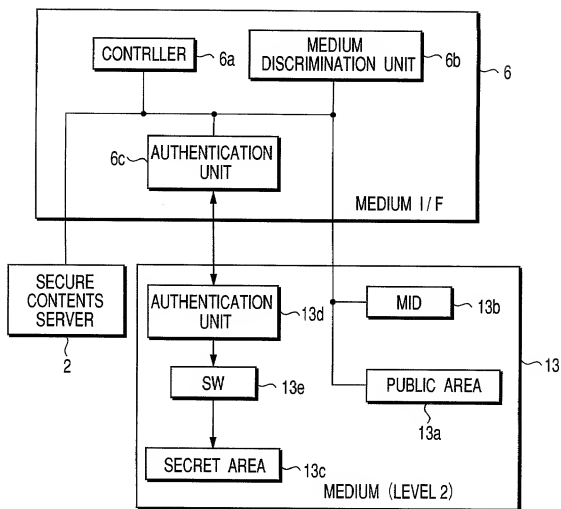


FIG. 5

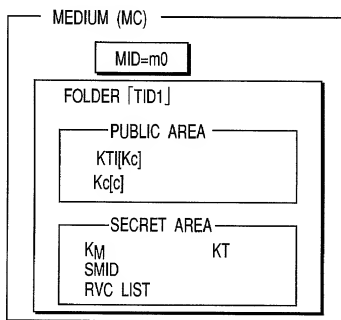


FIG. 6

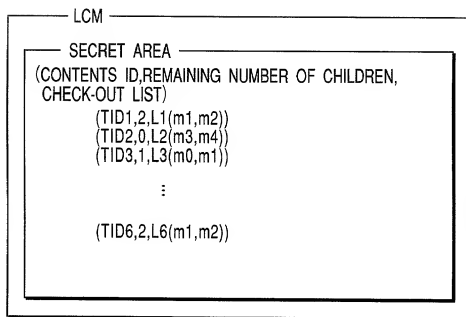


FIG. 7A

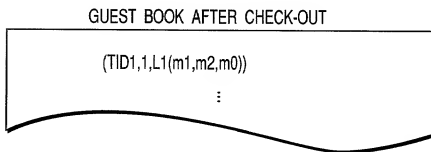


FIG. 7B

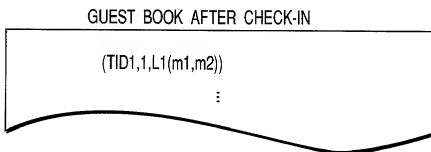


FIG. 7C





FIG. 8A

K<sub>M</sub>: GLOBAL SECRET INFORMATION (SECRET INFORMATION  
COMMON TO GIVEN NUMBER OF MEDIA)

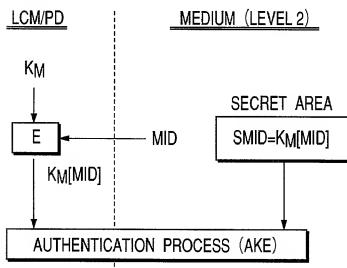

**F I G. 8B**

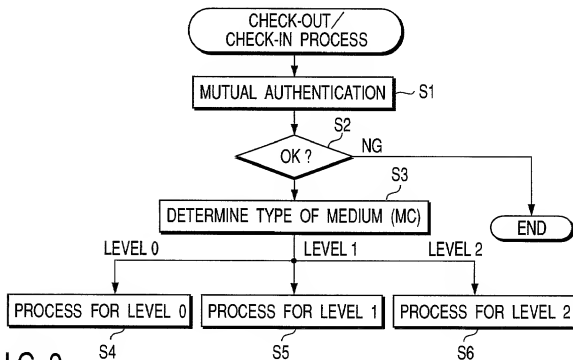


FIG. 9

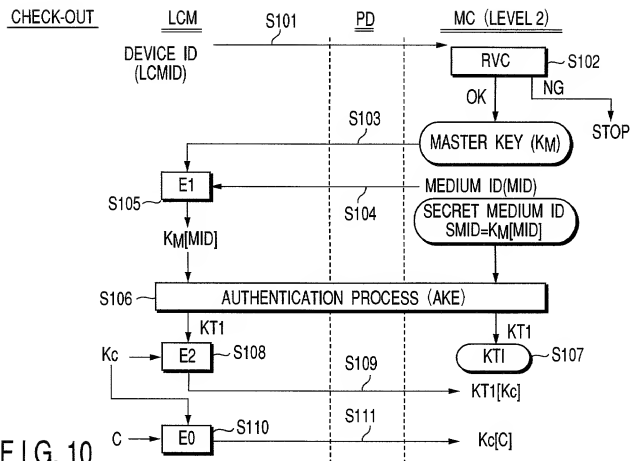


FIG. 10



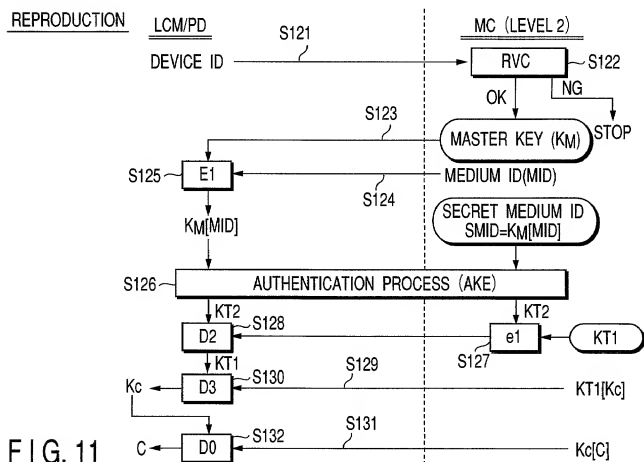


FIG. 11

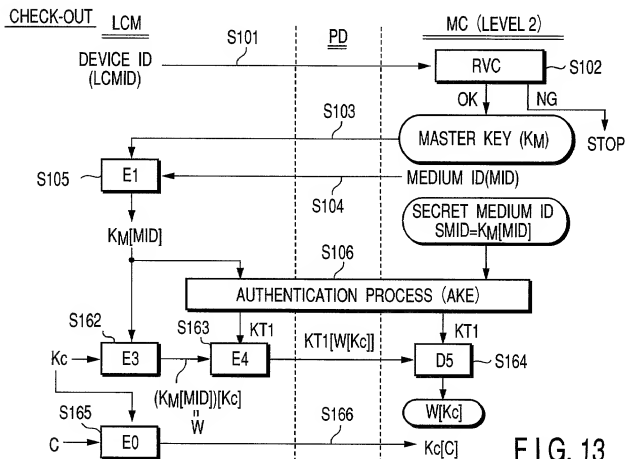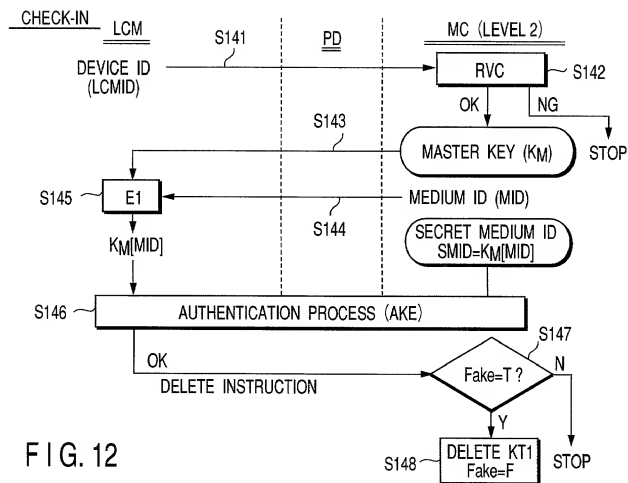

# REPRODUCTION

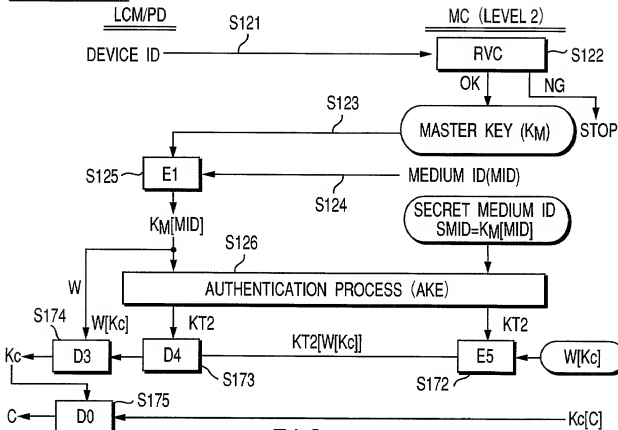


FIG. 14

# CHECK-OUT

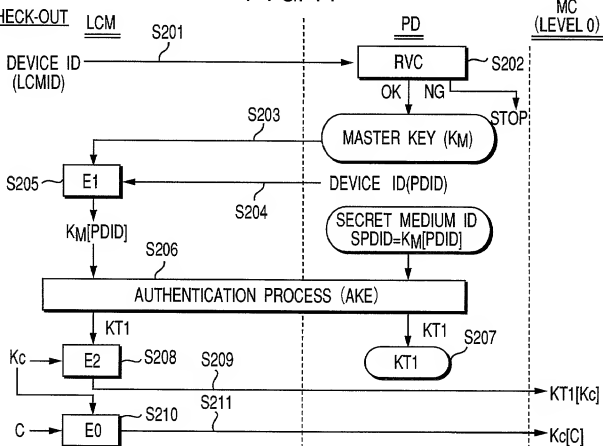


FIG. 15

# REPRODUCTION

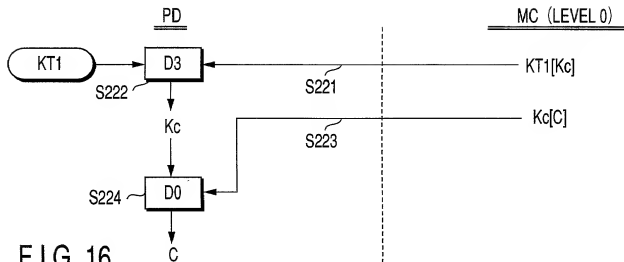


FIG. 16

# CHECK-IN


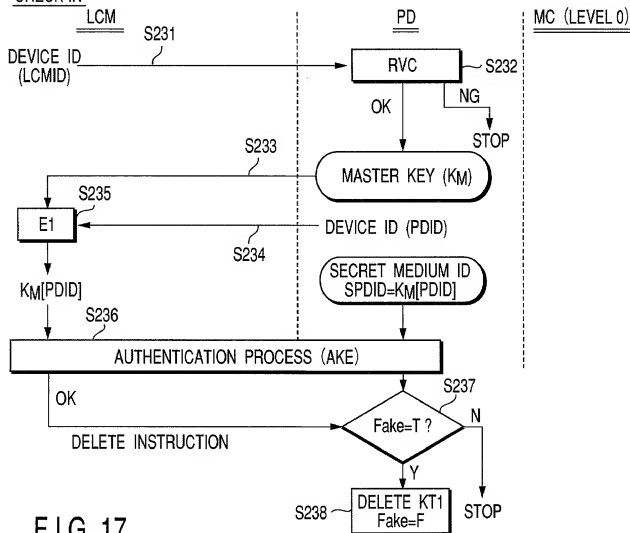


FIG. 17






# REPRODUCTION

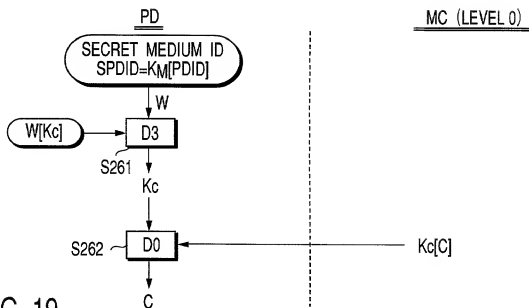

# CHECK-IN

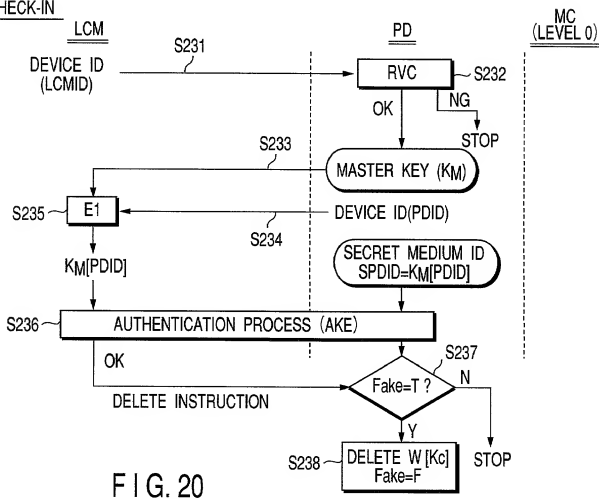

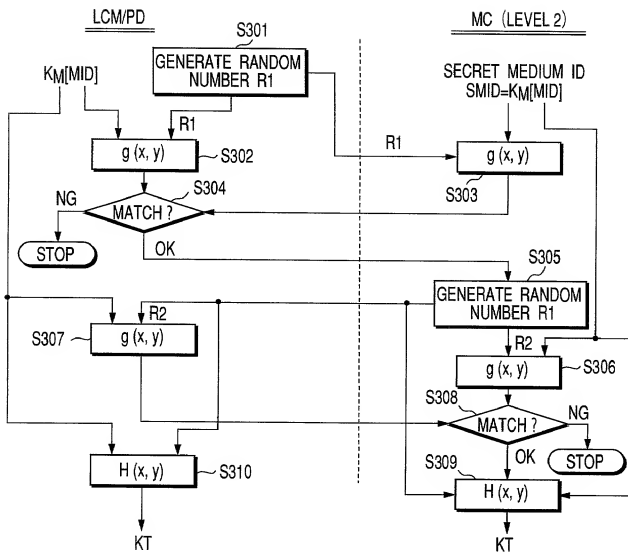


FIG. 21

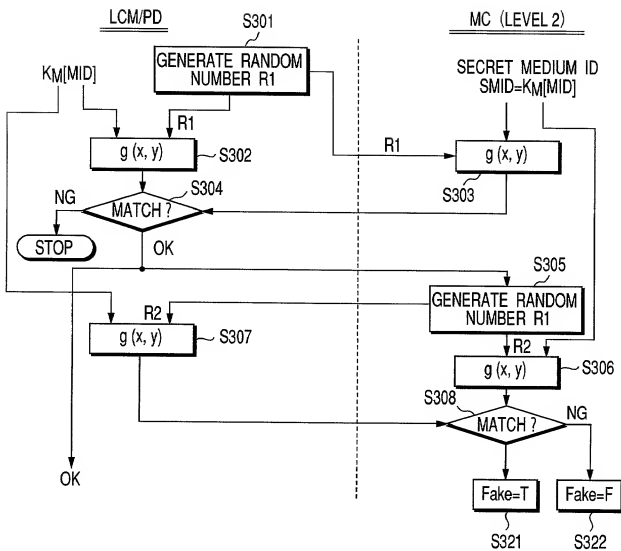


FIG. 22